



New Japan Radio Co., Ltd.

Technical
Information

Rev.1

MAF1565N

X-Band Magnetron



MAF1565N is designed for the magnetron of x-band radar system.

The frequency range is fixed <9380 - 9440MHz> and the peak output power is 10kW.

---- MAXIMUM RATINGS ----

	Min	Max	Unit
Peak anode current	3.0	7.0	A
Average anode power input	-	50	W
Duty cycle	-	0.001	-
Pulse duration	0.07	1.25	us
Rate of rise of voltage pulse	-	70	kV/us
Anode temperature	-	120	degree centigrade
V.S.W.R at the output coupler	-	1.5:1	-

---- ELECTRICAL ----


	Min	Typical	Max	Unit
Heater voltage	6.0	6.3	6.6	V
Heater current (Note 1)	-	-	-	A
Preheat time	65	-	-	S
Peak anode voltage (Note 2)	5.4	5.6	6.0	kV
Peak output power (Note 2)	10.0	10.5	-	kW
Frequency (Note 2)	9380	9410	9440	MHz

Notes:

1. Measured with heater voltage of 6.3V and no anode input power, the heater current limits are 0.5A minimum, 0.6A maximum. No reduction of heater voltage at operating is required.
2. Measured at peak anode current 4.5 A.

OUTLINE

Note: Dimensions are in mm

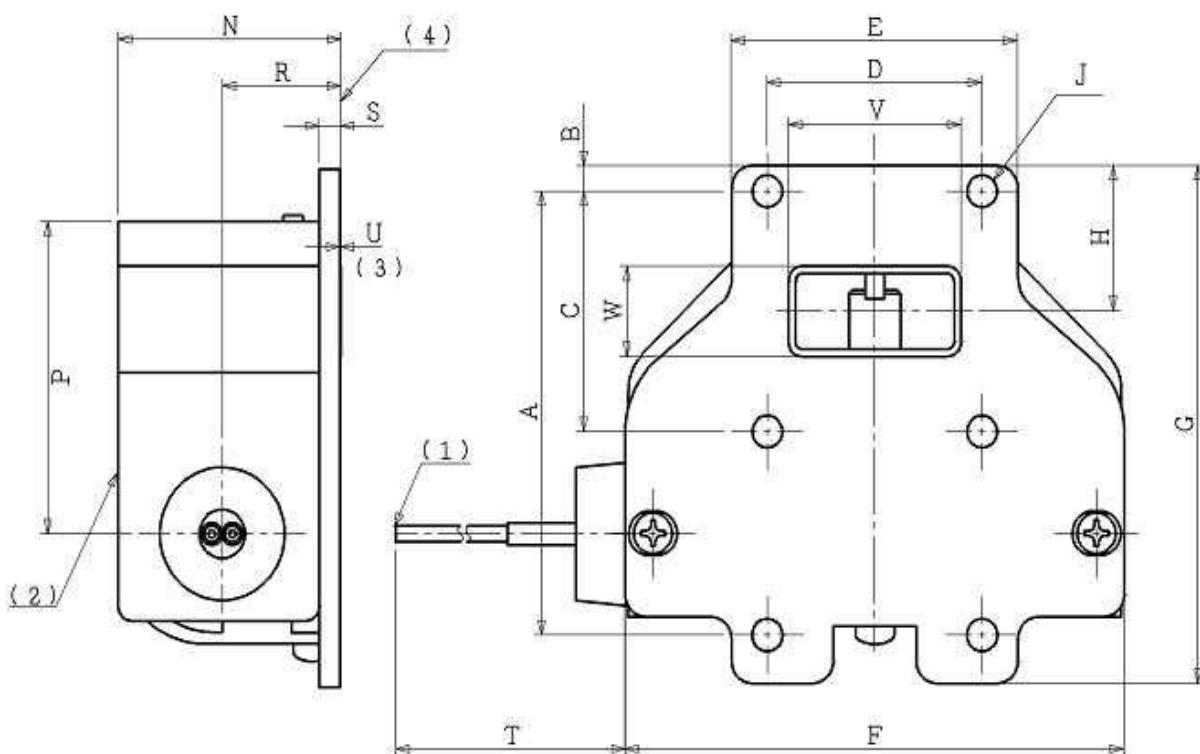

A	60 ± 0.2	L	9
B	3.75	M	7
C	32.5 ± 0.1	N	33 MAX
D	31 ± 0.1	P	43
E	41.3	R	17
F	72	S	3
G	70	T	185 ± 10
H	20	U	0.1 ± 0.05
J	$4 - \phi 4.32 \pm 0.08$	V	24.9 ± 0.2
K	$2 - \phi 4.4 \pm 0.1$	W	12.2 ± 0.2

Lead Connections

Colour	Element
Green	Heater
Yellow	Heater, Cathode

